


# OIL HEATER HHO SERIES



Leehove 2 | 2678 MC De Lier | The Netherlands  
T (+31) 174 - 516741 | F (+31) 174 - 518021  
info@hollandheater.nl

[WWW.HOLLANDHEATER.NL](http://WWW.HOLLANDHEATER.NL)

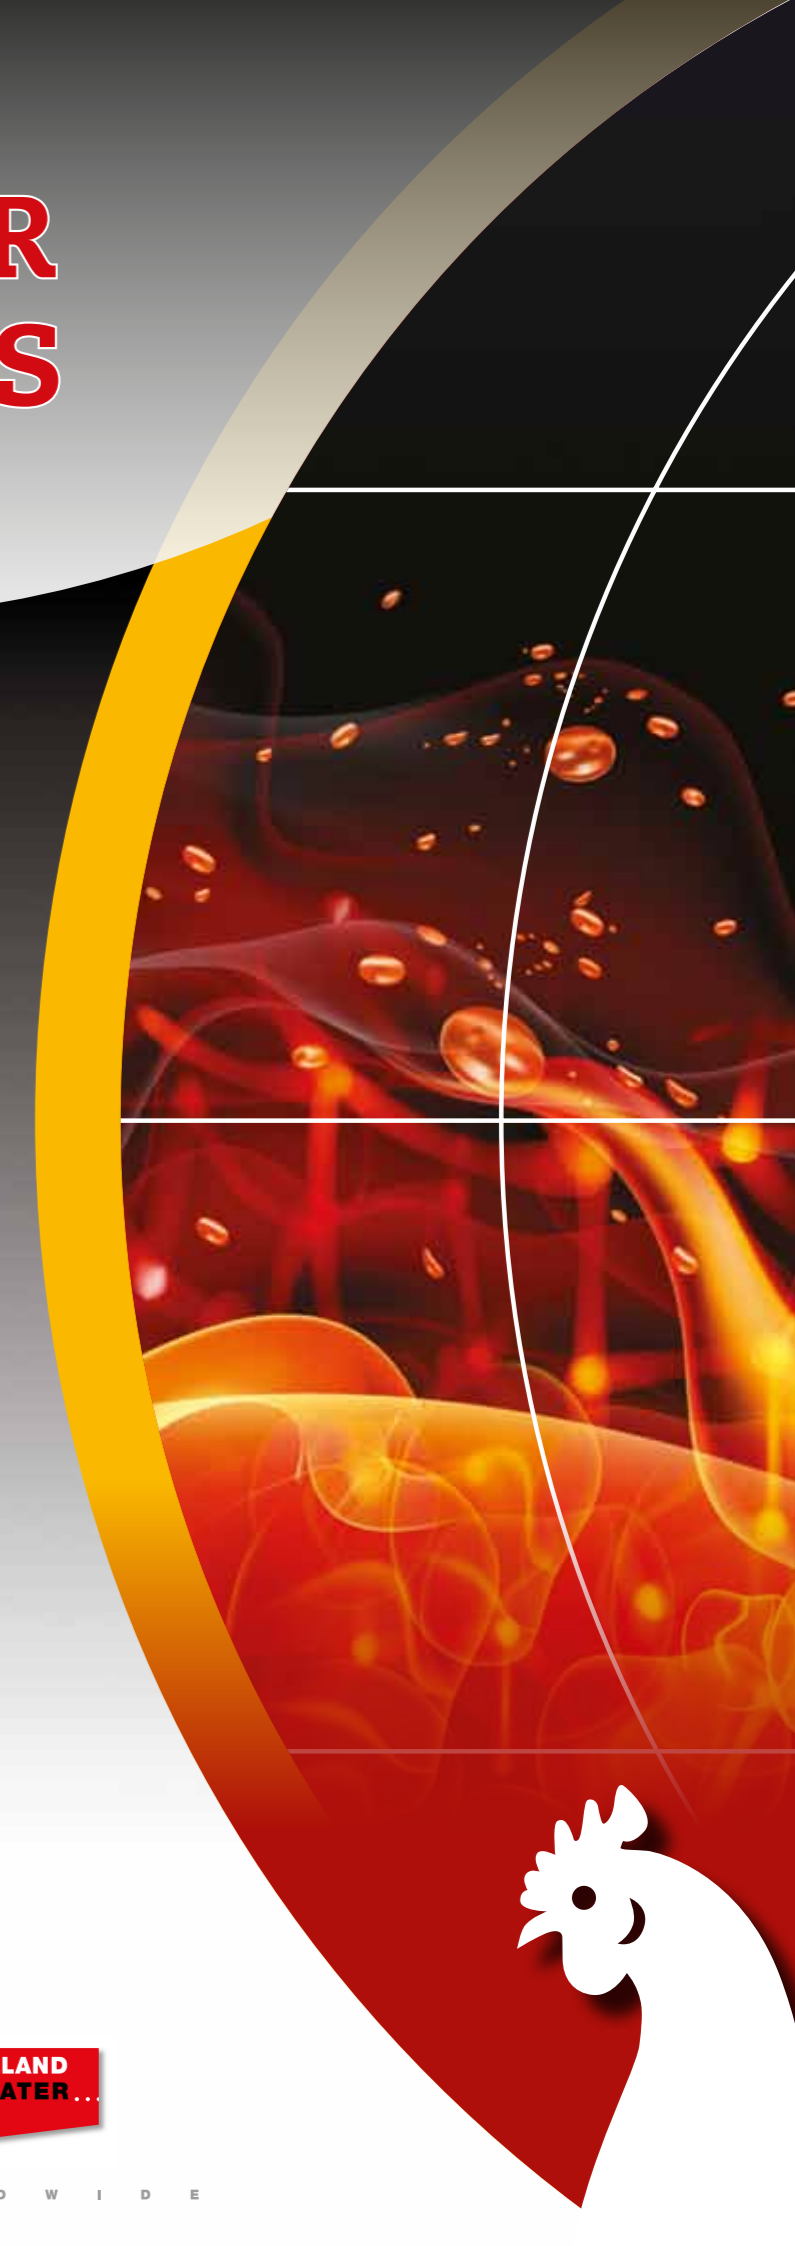

W O R L D W I D E




W O R L D W I D E

# HHO SERIES - Long lifetime and efficient oil heaters

The HHO oil direct fired heater is an innovative and effective solution to heat livestock buildings. More than 40 years of experience and knowledge have gone into designing a durable and highly efficient air heater. We know that it is really important to you as a Producer that heaters perform well and are available at competitive prices.

## Product benefits

- Significant energy cost savings due to 100 % efficiency. Hot air blown into a livestock building.
- Control automation by means of a climate control computer.
- Only one motor required for both fan and oil pump.
- Optimised airflow with a maximum length of 40 meters, due to correct position of the fan.
- Burner protection by photocell.
- Prevention against overheating due to maximal thermostat.
- The price includes air vent/filter.
- Very simple internal cleaning due to easy-open inspection cover. Heater (IP65) resists through intensive cleaning with compressed air or pressure washer.
- High quality materials that guarantee long life and are robust despite intensive cleaning.
- Heater comprises of components from well-known brands which are easy to get locally, and to change.
- Clear LED lighting as fault and status indication of the heater due to lamp in the control box.

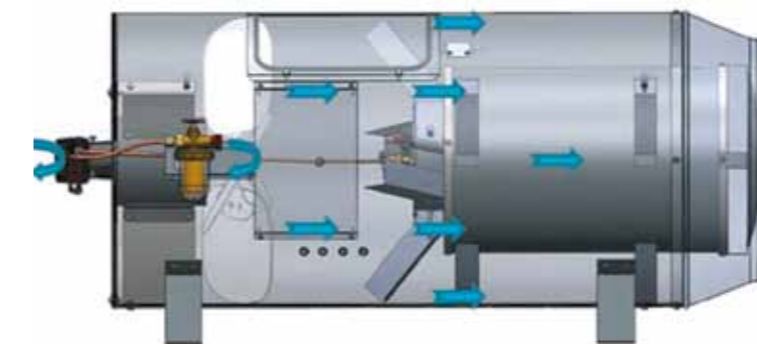

## Technical specification

TYPE: HHO Series		8L	10L	12L
Rated load	kW	80	100	120
Airmovement	m <sup>3</sup> /h	7700	7700	7700
Electric consumption	Amp.	5,1	5,1	5,1
Frequency	Hz	50/60	50/60	50/60
Engine power	Watt	1150	1150	1150
Voltage	Volt	230	230	230
Revolution speed	T. p/min.	1400	1400	1400
Air throw	mtr	40	40	40
Weight	kg	55	55	65
Length	mm	1268	1268	1368
Width	mm	664	664	664
Height	mm	591	591	591

*No rights can be derived from this technical specifications.*

